


surestep® digital print




17992 | ice cream

17982 | moon

Forbo is now introducing digitally printed safety vinyl in Surestep™ Moon™ and Ice Cream™ are ready to use examples of the endless possibilities of this innovative production technology. Contact us to find out what we can do for your customised design requirement.

slip resistance explained

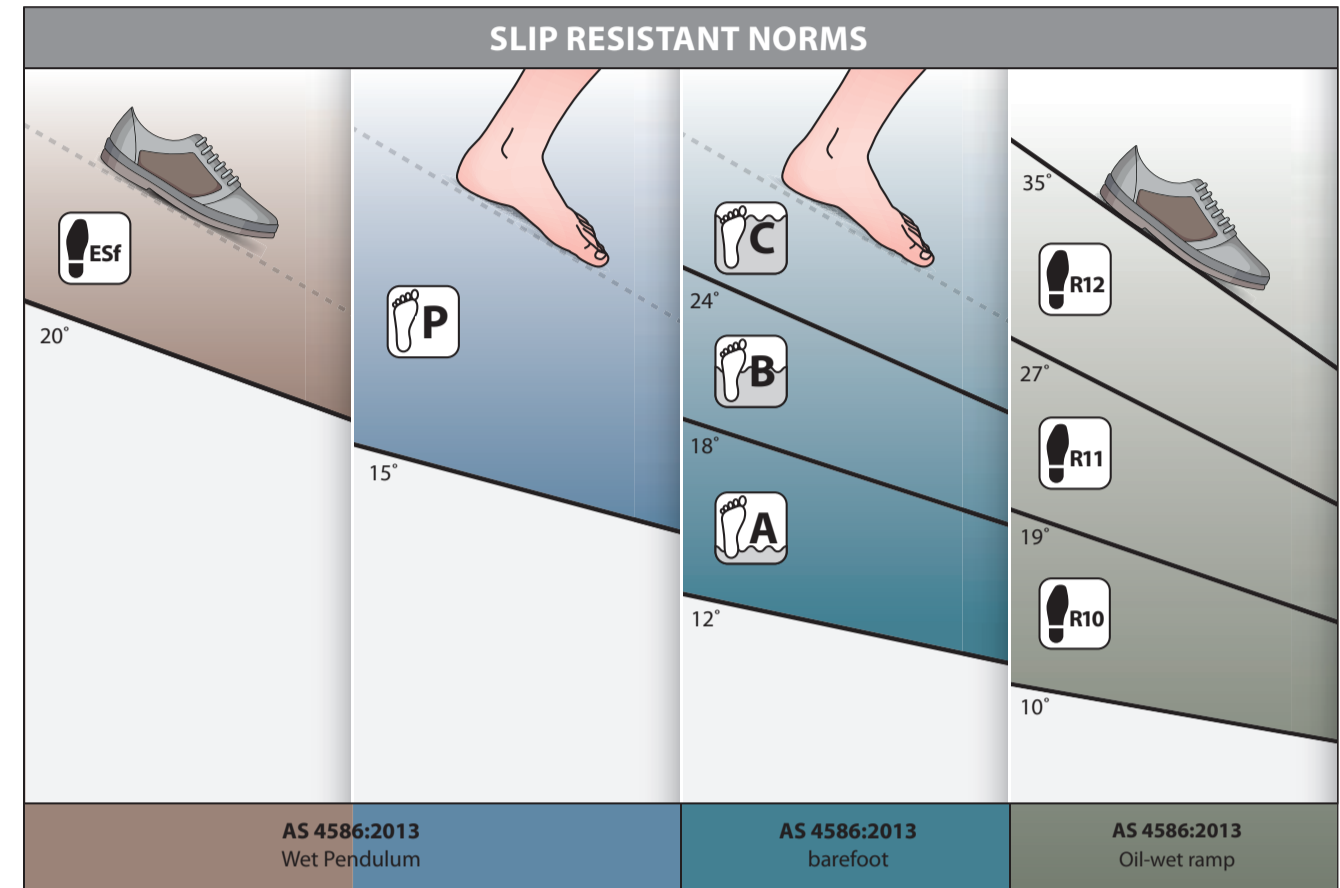

All Surestep R10 Safestep R11 Safestep R12 Safestep Aqua R10 Surestep Laguna Surestep Aqua Surestep Star Barefoot Surestep Laguna (B) Safestep Aqua (C) Surestep Star Barefoot (B) All Surestep R10 Safestep R11 Safestep R12 Safestep Aqua R10

The Forbo Step™ range has solutions for all applications where safety flooring is a requirement. From Surestep ranges for general use to Safestep industrial or wet room solutions: we have designed the floors that work and look best in each application.



CONFIDENCE

All ranges are designed with the application in mind, including fresh and comfortable solutions for continuously wet and barefoot/footwear combined areas. Introducing a new unique design in trendy Surestep Steel, and inspiring new possibilities in digitally printed safety flooring.

DESIGN

A collection that covers all relevant slip resistance ratings that can be used across co-ordinated colour schemes. Safety vinyl flooring with lifetime slip resistant performance, created with slip resistant particles throughout the matrix. This range offers the largest diversity in safety vinyl solutions, aesthetically pleasing but with no compromise on performance.

SAFETY

The Forbo Step range offers the best in safety vinyl flooring. Additionally, the benefit of easy cleaning for life, design and colour. The Forbo Step range offers the best in safety vinyl flooring. Additionally, the benefit of easy cleaning for life, design and colour.

The Step range meets the AS/NZS 4586:2013 standard and European slip resistance norms and delivers safety with minimal compromise in terms of cleaning and maintenance due to the PUR Pearl finish. All Step safety vinyl flooring provides slip resistant performance throughout the life of the product. The ranges are designed to be easy to combine with other Forbo collections such as Sphera, Eternal and the new wall covering range Onyx+.

COMMITTED TO THE HEALTH OF ONE

The recycled content in the backing. The collection also offers items with high LRV ratings. The product itself is 100% printable free, has Step Crystals using recycled material and up to 70% recycled content in the backing.



onyx+



onyx+ 26511 | grey surestep 17122 | cool concrete

Onyx+ is a Group 1 fire rated durable vinyl wall covering, specifically developed for commercial wet room applications such as health facilities, nursing homes or sporting complexes.

Onyx+ is designed to co-ordinate with Step to offer a complete and visually attractive wet-room solution from floor to wall.

This 0.92 mm thick product can be hot welded and is easy to install.

For the full technical specification, installation and floorcare information, please visit www.forbo-flooring.com.au



Technical specifications

Step safety vinyl meets the requirements of EN-ISO 10582 & EN 13845



	EN-ISO 10582	Surestep Original Surestep Steel	Surestep Material Surestep Wood Surestep DP	Safestep R11	Safestep R12	Safestep Aqua	Surestep Star Barefoot Surestep Laguna
Total thickness	EN-ISO 24346	2.0 mm	2.0 mm	2.0 mm	2.0 mm	2.0 mm	2.0 mm
Thickness wear layer	EN-ISO 24340	0.7 mm	0.7 mm	0.7 mm	0.7 mm	0.7 mm	0.7 mm
Commercial very heavy	EN-ISO 10874	Class 34	Class 34	Class 34	Class 34	Class 34	Class 34
Light industrial	EN-ISO 10874	Class 43	Class 43	Class 43	Class 43	Class 43	Class 43
Collection size		33 - 9 - 4	11 - 11 - 2	9	9	8	3 - 15
Roll width	EN-ISO 24341	2.00 m	2.00 m	2.00 m	2.00 m	2.00 m	2.00 m
Roll length	EN-ISO 24341	20 - 27 m	20 - 27 m	20 - 27 m	20 - 27 m	20 - 27 m	20 - 27 m
Total weight	EN-ISO 23997	2.75 kg/m ²	2.75 kg/m ²	2.75 kg/m ²	2.75 kg/m ²	2.75 kg/m ²	2.75 kg/m ²
Dimension stability	EN-ISO 23999	< 0.1%	< 0.1%	< 0.1%	< 0.1%	< 0.1%	< 0.1%
Residual indentation	EN-ISO 24343-1	≤ 0.05 mm	≤ 0.05 mm	≤ 0.05 mm	≤ 0.05 mm	≤ 0.05 mm	≤ 0.05 mm
Castor chair continuous use	EN 425	No effect	No effect	No effect	No effect	No effect	No effect
Use in wet areas	EN 13533	Yes	No	Yes	Yes	Yes	Yes
Light fastness	EN-ISO 105 B-02	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Flexibility	EN-ISO 24344	ø 10mm	ø 10mm	ø 10mm	ø 10mm	ø 10mm	ø 10mm
Slip resistance	EN 13845 Annex C EN 13845 Annex D D 50000 revolutions < 10% loss DIN 51130 AS 4586:2013 oil-wet ramp DIN 51007 AS 4586:2013 barefoot	ESF Pass	ESF Pass	ESF Pass	ESF Pass	ESB Pass	ESB/ESF Pass
Chemical resistance	EN-ISO 20887	Very good	Very good	Very good	Very good	Very good	Very good
Electrical resistance	EN 1081 (R1)	> 1.10 ¹² Ω	> 1.10 ¹² Ω	> 1.10 ¹² Ω	> 1.10 ¹² Ω	> 1.10 ¹² Ω	> 1.10 ¹² Ω

Step safety vinyl meets the requirements of EN 14041

	EN 13501-1	AS/NZS 5229-1	EN 13501-1	EN 13501-1	EN 13501-1	EN 13501-1
Reaction to fire	>B/W/m ²	>B/W/m ²	>B/W/m ²	>B/W/m ²	>B/W/m ²	>B/W/m ²
Body voltage	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV
Thermal conductivity	0.25 W/m.K	0.25 W/m.K	0.25 W/m.K	0.25 W/m.K	0.25 W/m.K	0.25 W/m.K
Slip resistance	DS: ≥ 0.30	DS: ≥ 0.30	DS: ≥ 0.30	DS: ≥ 0.30	DS: ≥ 0.30	DS: ≥ 0.30

All Forbo Flooring Systems' sales organisations worldwide have a certified Quality Management System in accordance with ISO 9001. All Forbo Flooring Systems' manufacturing operations have a certified Environmental Management System in accordance with ISO 14001. The Life Cycle Assessment (LCA) of Forbo Flooring Systems' products is documented in individual Environmental Product Declarations (EPDs) which can be found on all of our websites.

New Zealand
 Inside Commercial Ltd
 Level 2, 34 Barys Point Rd
 Takapuna Auckland 0622
 Tel: +64 9 441 9850
 Fax: +64 9 441 9851
 E-mail: enquiries@inside.co.nz
 www.inside.co.nz

Australia
 Forbo Flooring Systems Pty Ltd
 23 Dimity Place
 Wetherill Park NSW 2154
 Tel: +61 2 9828 0000
 Fax: +61 2 9723 3456
 E-mail: info.au@forbo.com
 www.forbo-flooring.com.au

Find us on
 f t p i n d



step® safety flooring
surestep® | safestep®





creating better environments

creating better environments


FLOORING SYSTEMS

FLOORING SYSTEMS

surestep® original

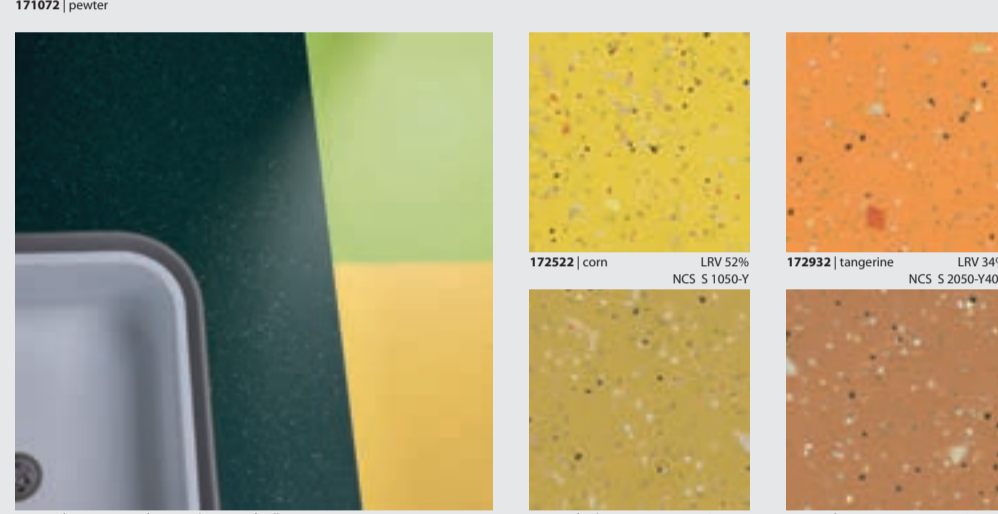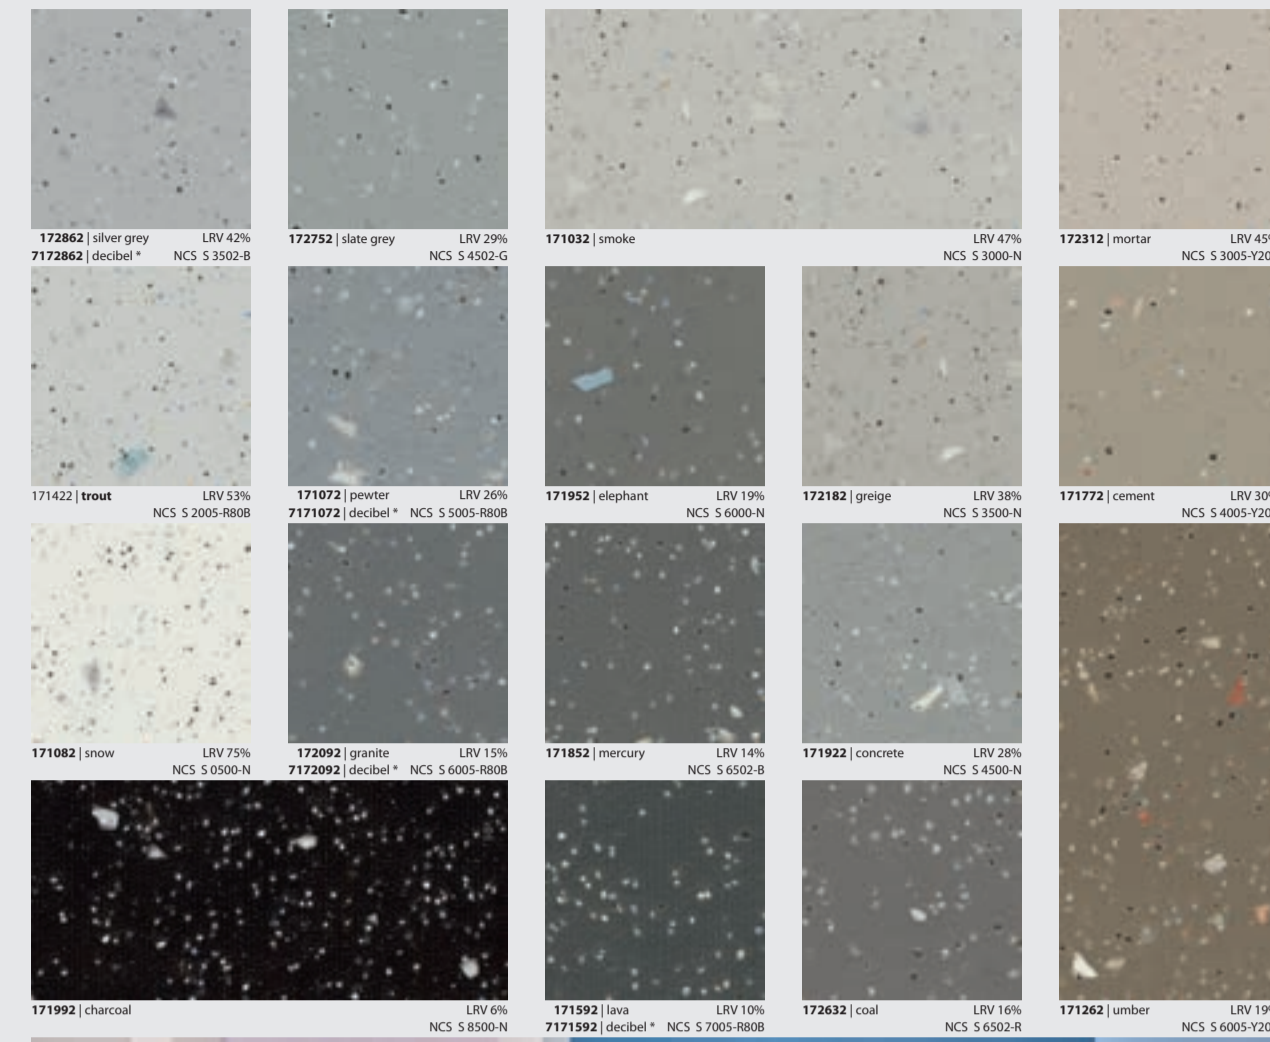


172522 (com 172802) [sawed 172982] yellow green

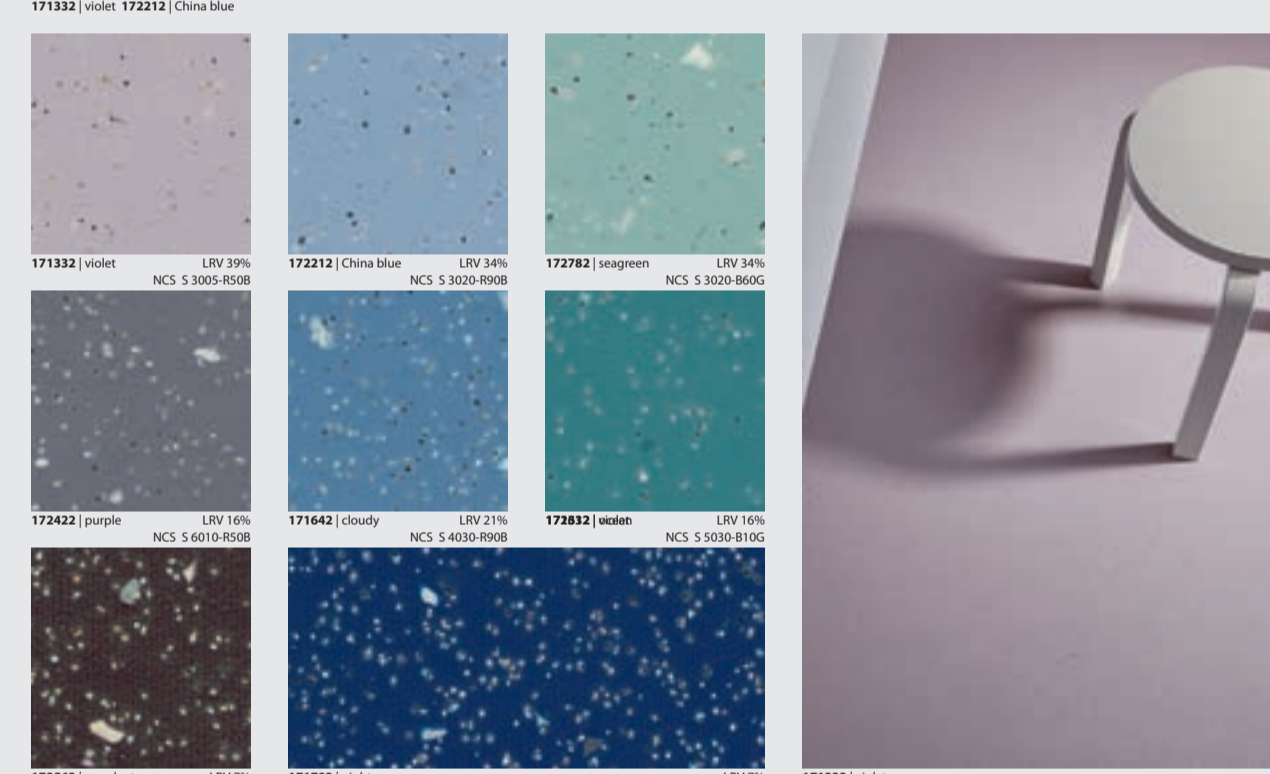


172522 (com 172802) [sawed 172982] yellow green

surestep® star

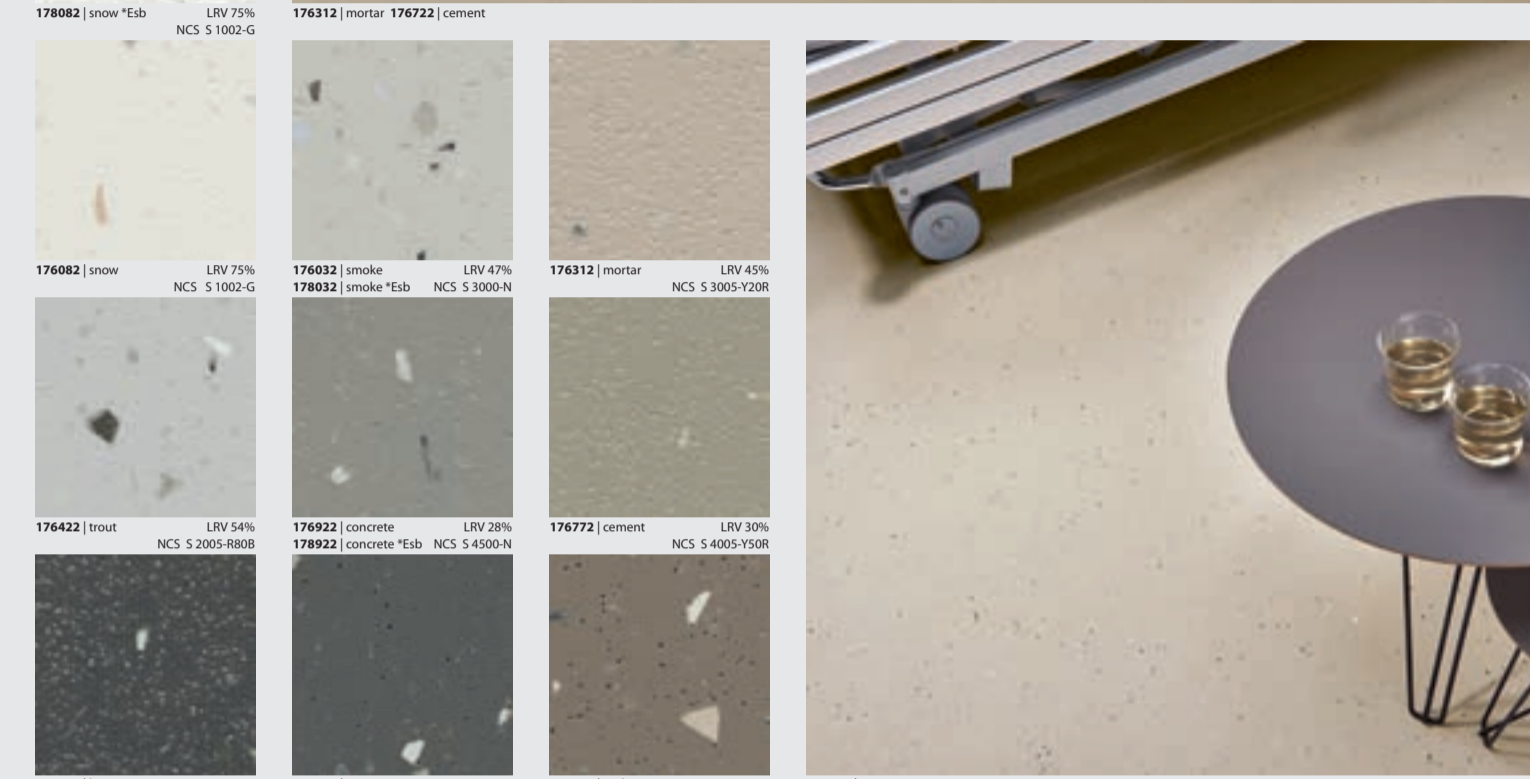


176082 (snow) 176082 (snow) 176082 (snow) 176082 (snow) 176082 (snow) 176082 (snow) 176082 (snow) 176082 (snow) 176082 (snow) 176082 (snow) 176082 (snow) 176082 (snow)

surestep® material

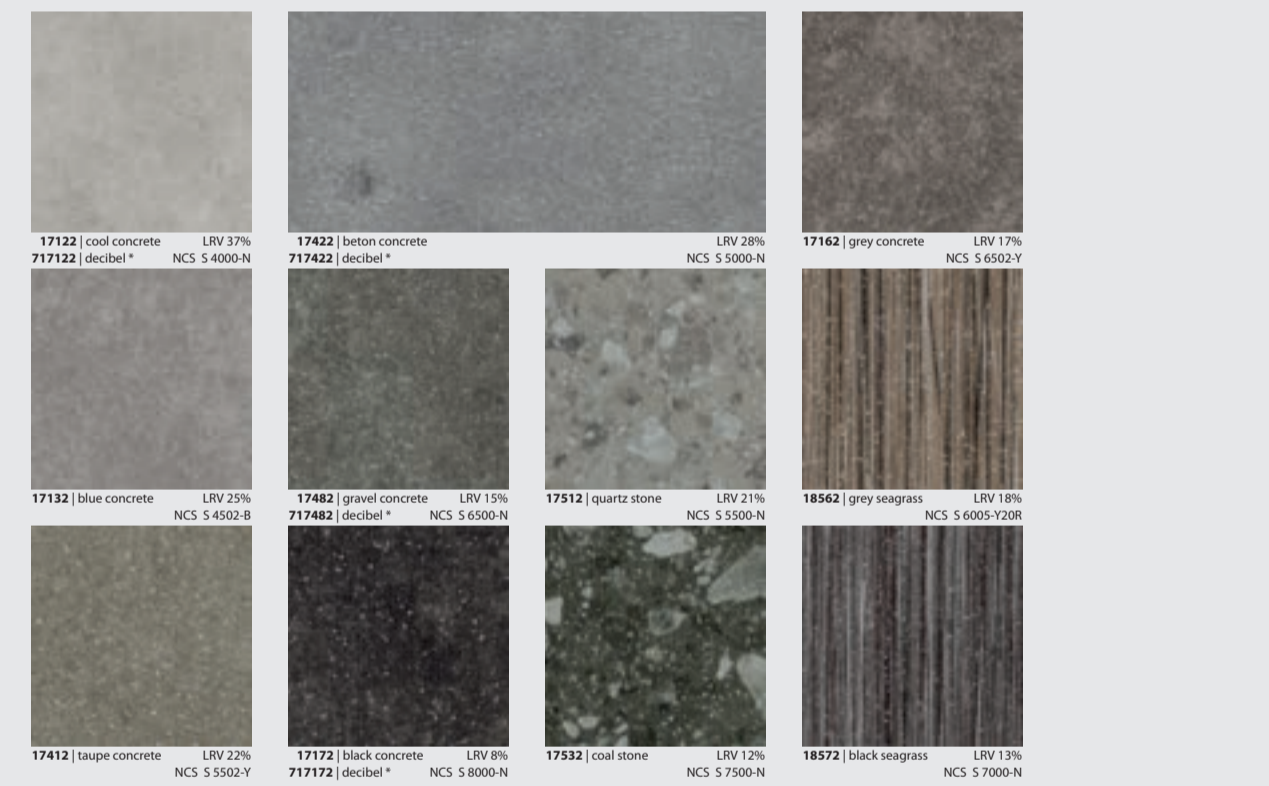

17412 (saige concrete) 17412 (saige concrete) 17412 (saige concrete) 17412 (saige concrete) 17412 (saige concrete) 17412 (saige concrete) 17412 (saige concrete) 17412 (saige concrete) 17412 (saige concrete) 17412 (saige concrete) 17412 (saige concrete) 17412 (saige concrete)

surestep® wood

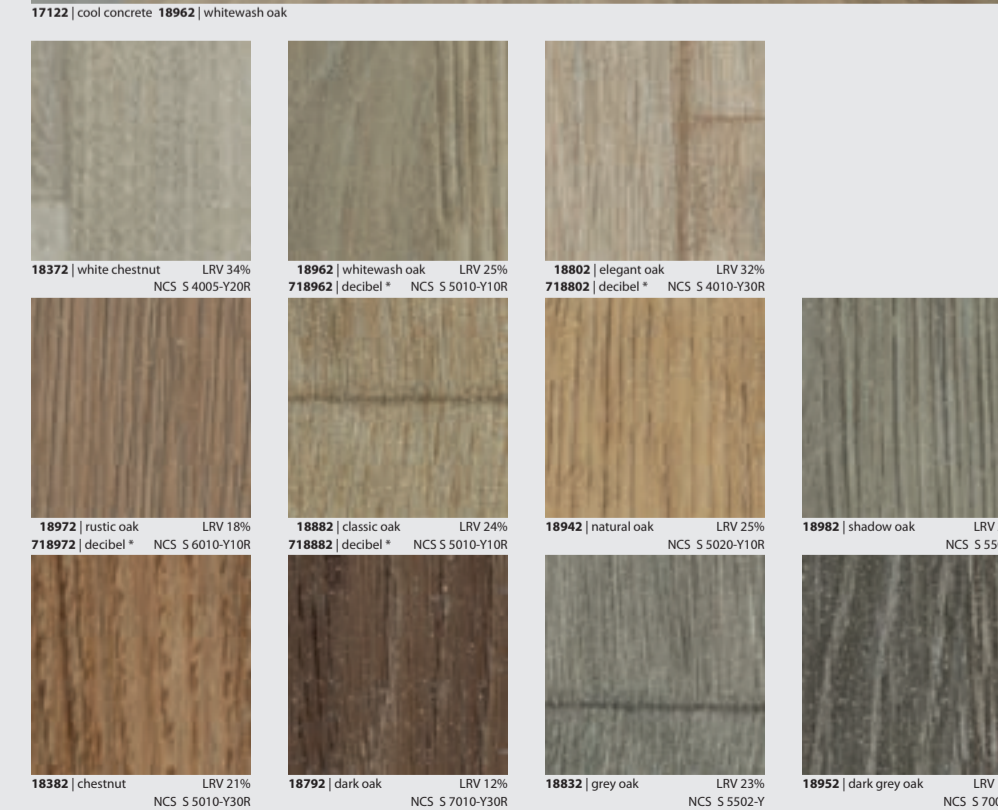


18182 (chestnut) 18182 (chestnut) 18182 (chestnut) 18182 (chestnut) 18182 (chestnut) 18182 (chestnut) 18182 (chestnut) 18182 (chestnut) 18182 (chestnut) 18182 (chestnut) 18182 (chestnut) 18182 (chestnut)

surestep® laguna




181692 (mouse) 181692 (mouse) 181692 (mouse) 181692 (mouse) 181692 (mouse) 181692 (mouse) 181692 (mouse) 181692 (mouse) 181692 (mouse) 181692 (mouse) 181692 (mouse) 181692 (mouse)

safestep® aqua

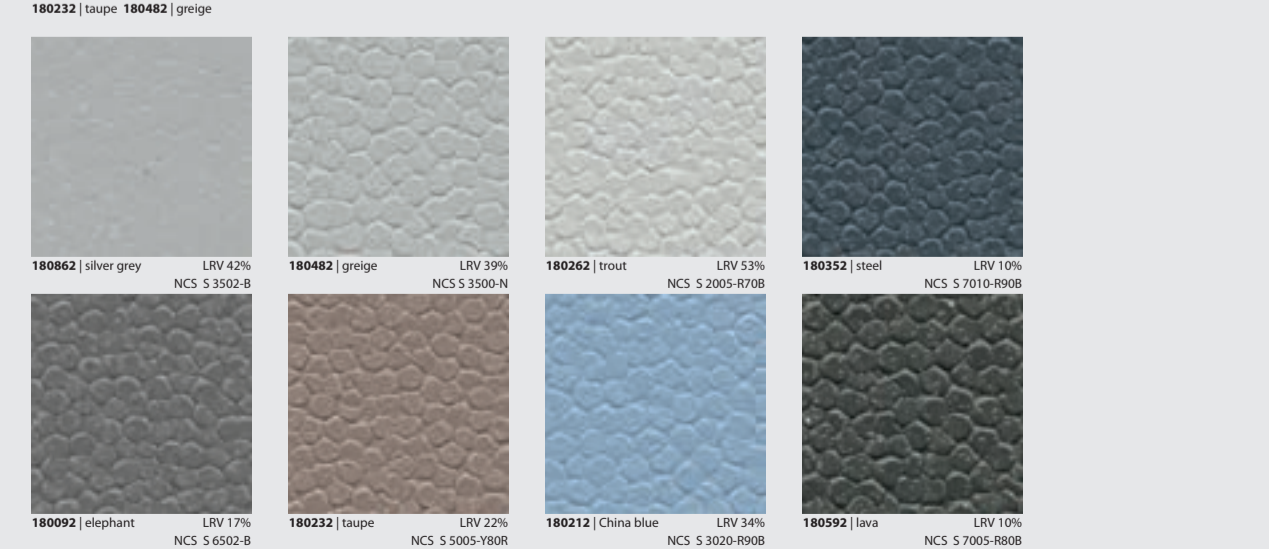



180092 (elephant) 180092 (elephant) 180092 (elephant) 180092 (elephant) 180092 (elephant) 180092 (elephant) 180092 (elephant) 180092 (elephant) 180092 (elephant) 180092 (elephant) 180092 (elephant) 180092 (elephant)

surestep® steel

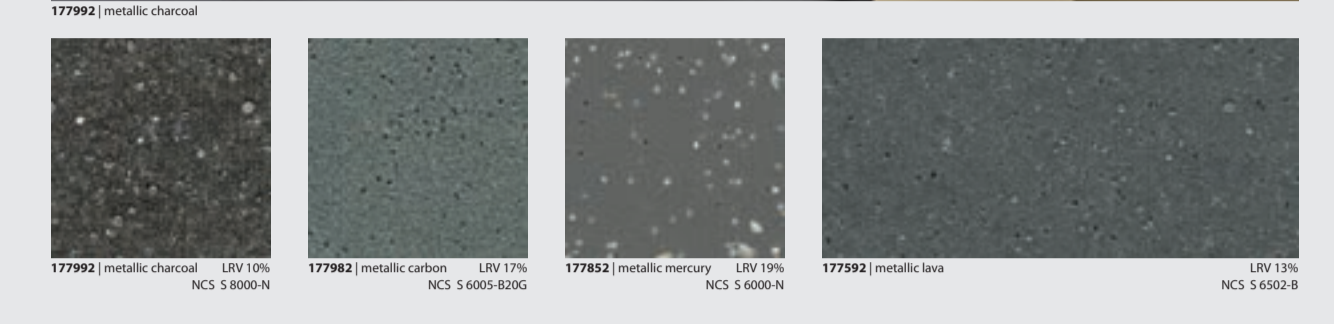



177992 (metallic charcoal) 177992 (metallic charcoal) 177992 (metallic charcoal) 177992 (metallic charcoal)

safestep® R11

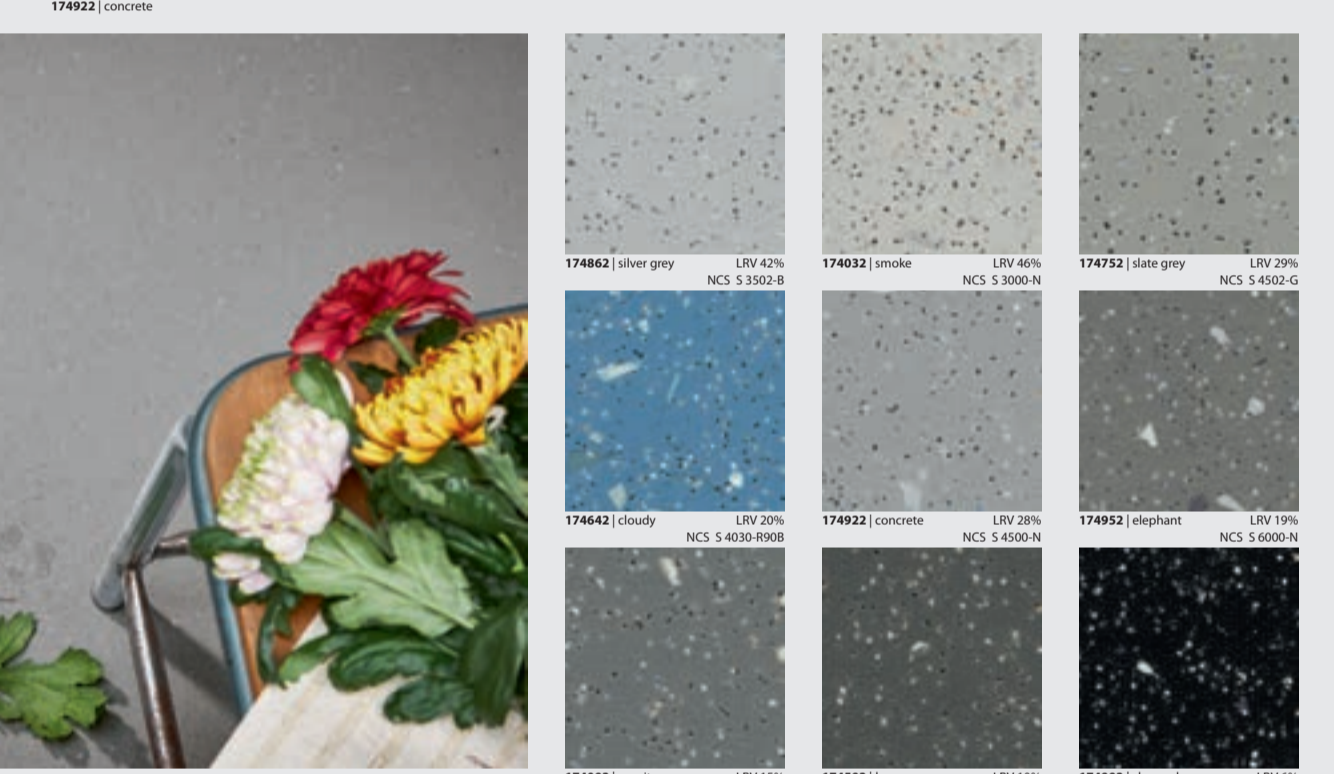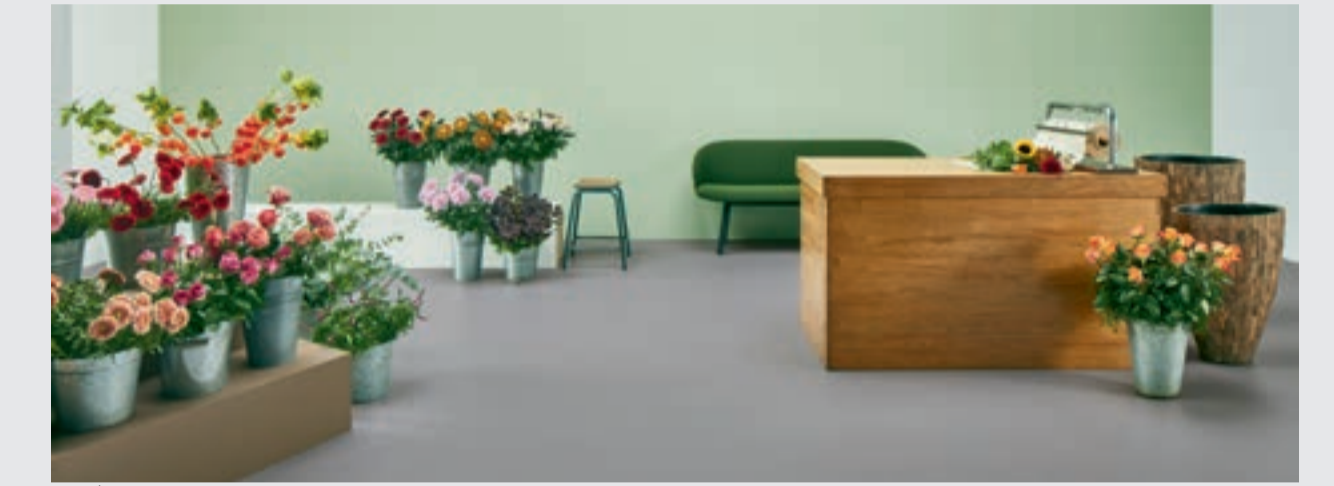

174922 (concrete) 174922 (concrete) 174922 (concrete) 174922 (concrete) 174922 (concrete) 174922 (concrete) 174922 (concrete) 174922 (concrete) 174922 (concrete) 174922 (concrete) 174922 (concrete) 174922 (concrete)

safestep® R12

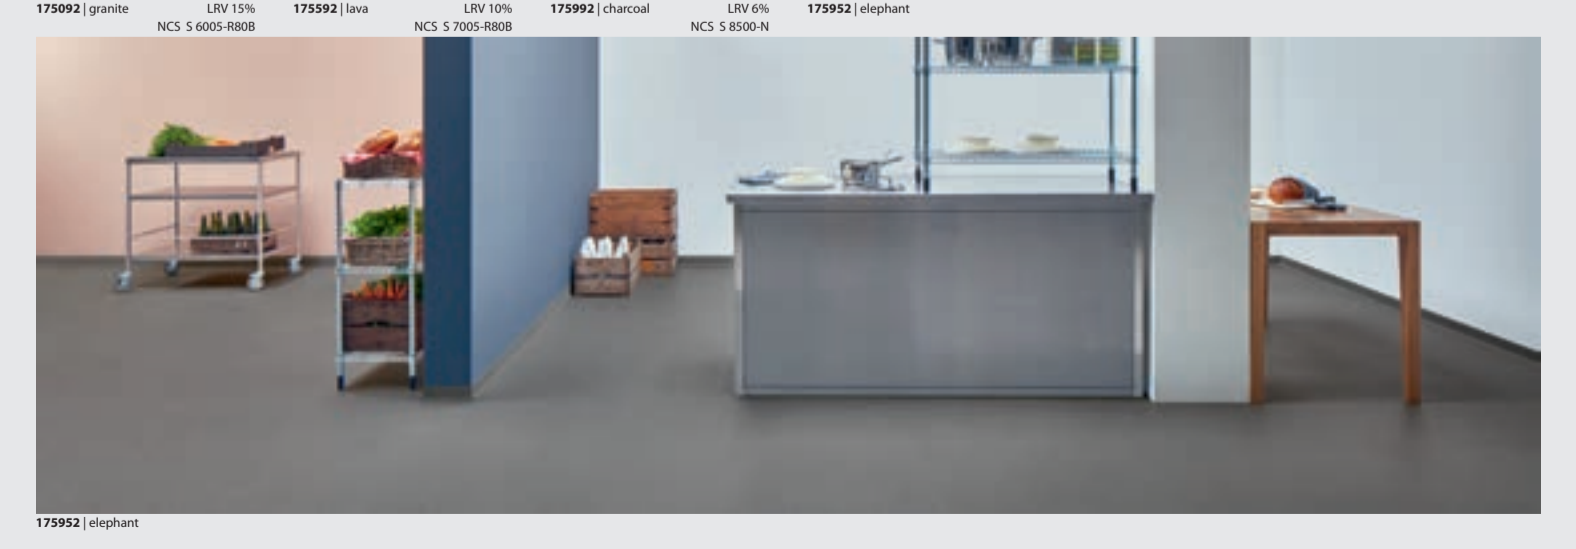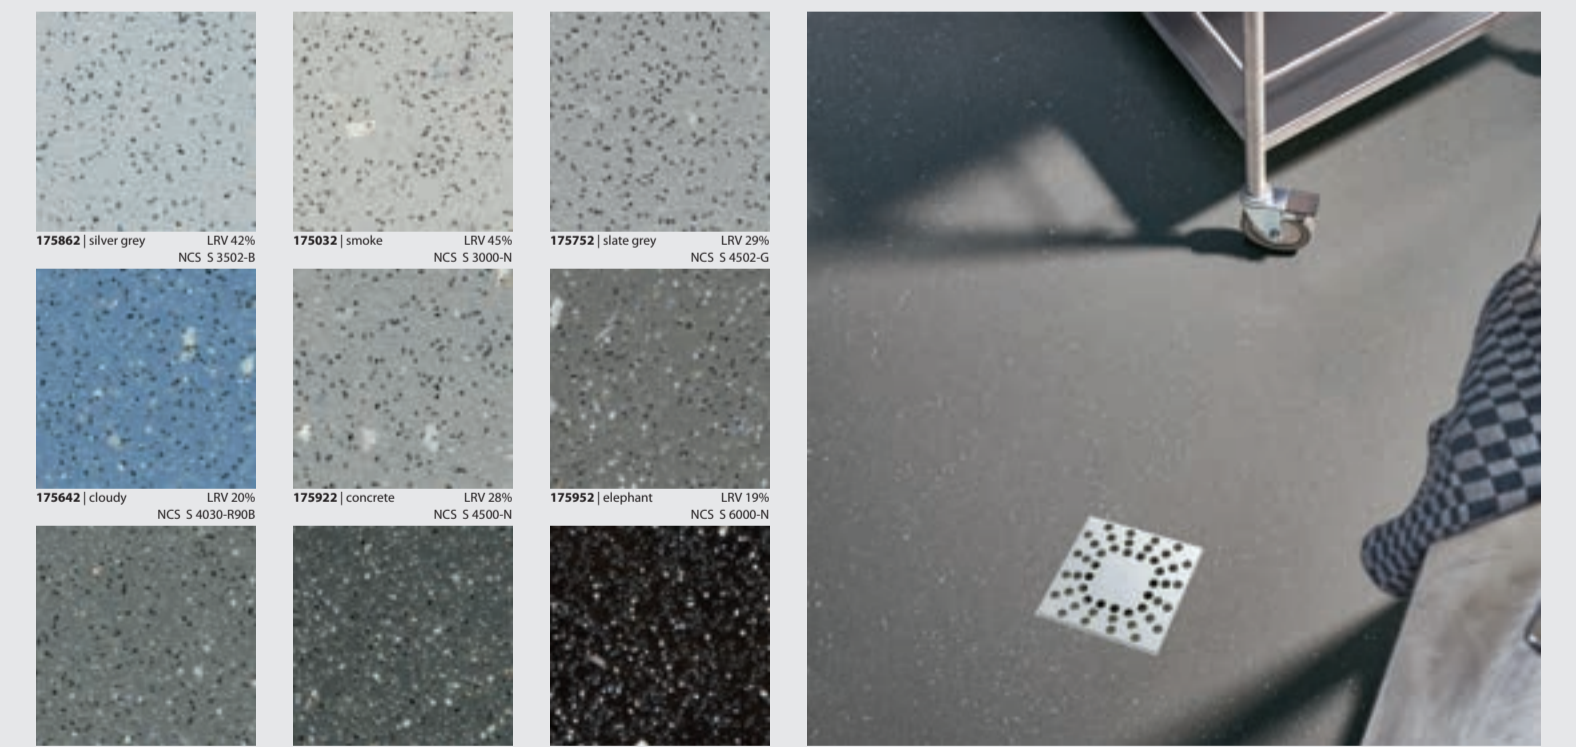

175992 (elephant) 175992 (elephant) 175992 (elephant) 175992 (elephant) 175992 (elephant) 175992 (elephant) 175992 (elephant) 175992 (elephant) 175992 (elephant) 175992 (elephant) 175992 (elephant) 175992 (elephant)

* These colours are available with 17dB impact sound reduction.