


The Bosch OptiFlow Professional range offers:

- ► OptiFlow combustion management system
- ► 6 Star efficiency
- ► Solar compatible appliance

Contact Bosch on 1300 30 70 37 or visit www.bosch-climate.com.au

SPECIFICATIONS			Model	
	Unit	16L	20L	26L
Technical features				
Bluetooth Enabled Appliance		No		
Star Rating		6 Stars		
Solar Compatible		Yes		
Temperature Controllers		Up to 4 temperature controllers		
Maximum Temperature		Preset at 55°C. Adjustable to 60°C and 70°C		
50°C compliant models available			Yes	
Weight (unpacked)	kg	15	15	18
Frost protection included			Yes	
Gas supply data				
Maximum Nominal Gas Consumption	Mj/h	122	149	199
Minimum Operating Gas Supply Pressure - NG	kPa		1.13	
Minimum Operating Gas Supply Pressure -LP	kPa		2.75	
Water Supply Data				
Maximum Permissible Pressure (static)	kPa		1000	
Minimum Operating Pressure	kPa		100	
Minimum Operating Pressure for Maximum Performance	kPa		300	
Minimum Water Flow	l/min		2	
L/min Temperature Rise (@25°C)	l/min	16	20	26
Maximum Inlet Temperature	°C		80	
Electrical Circuit				
Power Supply Voltage	Vac		230/240	
Frequency	Hz		50	
Power Consumption - Frost Protection	W		165	
Power Consumption - Normal Operation	W	57	57	70
Warranty Details (Domestic)				
Parts and Labour	Years		3	
Heat Exchanger (part only)	Years		12	
Pipe Connection Sizes				
Gas Connection - NG or LPG	mm		20mm	
Cold Water	mm		20mm	
Hot Water	mm		20mm	

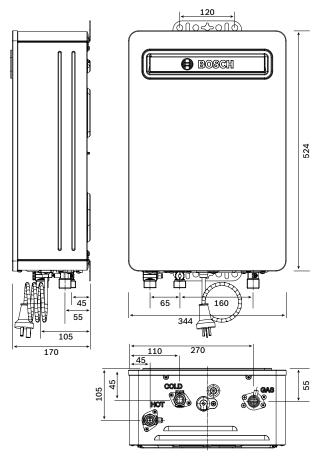

Description	Part Number
OptiFlow Professional 16L NG	7736503237
OptiFlow Professional 16L LPG	7736503238
OptiFlow Professional 16L NG 50°C Compliant	7736503235
OptiFlow Professional 16L LPG 50°C Compliant	7736503236
OptiFlow Professional 20L NG	7736503245
OptiFlow Professional 20L LPG	7736503246
OptiFlow Professional 20L NG 50°C Compliant	7736503243
OptiFlow Professional 20L LPG 50°C Compliant	7736503244
OptiFlow Professional 26L NG	7736503226
OptiFlow Professional 26L LPG	7736503227
OptiFlow Professional 26L NG 50°C Compliant	7736503224
OptiFlow Professional 26L LPG 50°C Compliant	7736503225

ACCESSORIES

Recess Box

Ideal for new homes, Bosch recess boxes allow OptiFlow systems to be completely recessed to save space. The recess box can also be painted to suit the appearance of your home.

Part no: 8736200270

Pipe Cover

A pipe cover can be easily attached to your Optiflow hot water system. It conceals the pipes leading into the appliance, giving a neat and smooth finish to the installation. This also allows the power point to be sheltered beneath the cover.

Part no: 8736200260





Controllers

OptiFlow controllers allow easy adjustment of the temperature at the appliance. Any combination of bathroom and main controllers can be used, however at least one main controller must be used if a set temperature above 50°C is required. Note: OptiFlow Controllers are each supplied with a 20m cable.

Main Controller (Part no: 7736504469)
Bathroom Controller (Part no: 7736504467)

